


Euro Oak Birch Multiply Rustic Technical Data Sheet

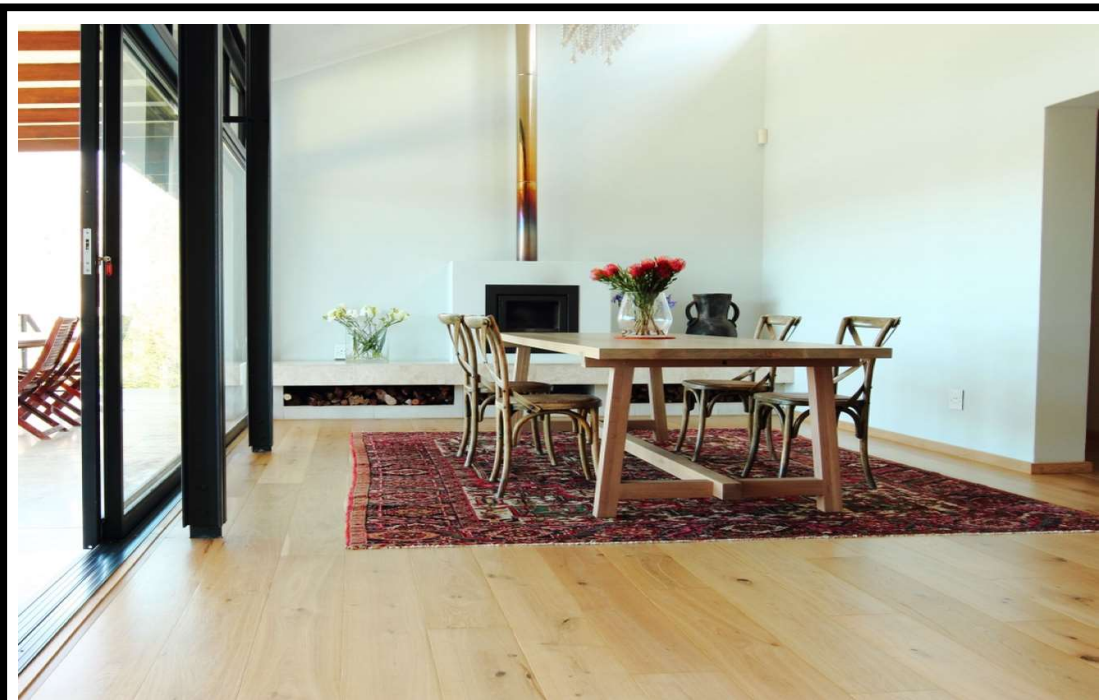

Product	Euro Oak Birch Multiply Rustic Select
Dimensions	190mm x 10mm x 2100mm with a 2mm top layer of European Oak.
Grading	Rustic has knots and some filled cracks in the boards, as well as less than 10% sap wood.
Construction	8mm Birch multilayer base for excellent stability, with a 2mm Oak layer from PEFC certified timber.
Guarantee	The supplier offers a 5 year guarantee against delamination of the Oak veneer and the cracking or buckling of the floor board subject to normal conditions. This means in an environment with a relative humidity of 40 – 60%. This is subject to product being glued down with Wakol MS 228 adhesive, and Wakol PU 280 moisture barrier when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content.
Formaldehyde	Emission E1
Pentachlorophenol	Emission > 5%
Underfloor Heating	Temperature compliant to 27 degrees.

Installation method	Glue down (according to SAWLFA specifications).
---------------------	---